
AARDENBURG



ALPHA XL FRONT

XL PERFORMANCE BEHIND AND IN FRONT OF THE TRACTOR

Highly productive and extremely tough. For professionals with the toughest and roughest jobs. Double-walled construction for extra resistance to damage from stones and sandblasting. 2-Sided drive and extended reach side shift on solid mounting frame for long-term use at maximum power. Ideally suited for use in stubble fields, dense high grass and uncultivated land by farmers and contractors.

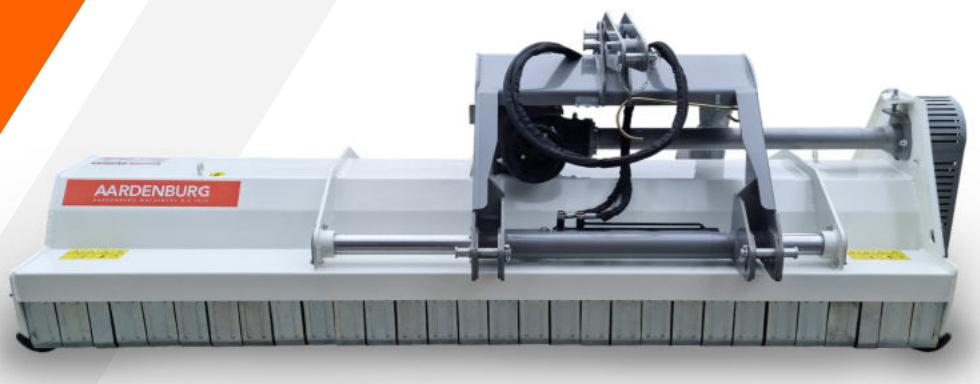

1. Dual-Connect

Mount either on the front or rear with dual-sided frame



2. Air-Cooled

Enjoy fan equiped XPB belts to keep the belt house cooled and clean



3. Dual-Wall

Enjoy a long lasting machine even under tough conditions with double walled wear resistance



4. Side-Shift

Simply adjust placement hydraulically to mow in between or underneath trees, hedges or fence posts

5. (Im)proved

Ease of mind with the special improved and proven Aardenburg design after intensive field testing and an extensive quality check

Specifications

Models	Weight kg	Working width mm	Power dimand HP	Attachment	PTO RPM	Drive system	Tenisoner	Tool pieces	Rotor diameter mm	Total diameter mm	Reach right mm	Reach left mm	Extended right mm	Extended left mm	Side shift mm	Cutting power mm
XL 2500	1054	2500	1000	CAT II, III	75	5 V-belt	24	28	205	495	1250	1250	1880	620	600	600
XL 2800	1132	2800	1000	CAT II, III	80	5 V-belt	26	32	205	495	1380	1420	2020	780	600	600
XL 3000	1180	3000	1000	CAT II, III	85	5 V-belt	28	34	205	495	1480	1520	2120	880	600	600

Spare parts / Options

Hammer



Y-Blade



